

IndiGo HSS

Handheld modular spectrometer

About GoyaLab

GoyaLab is a French SME that designs, develops and markets measurement tools based on spectrometry.

GoyaLab provides expertise in Research and Development, serving the industry in the development of specific applications in spectrometry.

GoyaLab's philosophy is to develop powerful spectrometry tools that are easy to use, mobile and affordable thanks to new communication technologies (smartphones, tablets).

GoyaLab wants to democratize spectrometry and make it accessible to everyone.



With IndiGo, the power of spectroscopy is at your fingertips

IndiGo High Spectral Sensitivity is a modular handheld spectrometer.

This new spectrometer allows the user to measure emission, absorption, reflection, or transmission spectra directly on a PC or a tablet / smartphone (via Bluetooth).

The wavelength range goes from 380 nm up to 780 nm with a typical resolution below 1.5 nm.

Thanks to its dedicated SpectroLab software (Windows & Android) it allows the user to make measurements anywhere, anytime, at a reasonable cost.


With its optional modules, IndiGo can become a fluorescence spectrometer, a reflection spectrometer or a chemical analyser that fits in your pocket.



Features

- Modular spectrometer >
- Bluetooth connectivity >
- > Battery or mains powered
- > CE & TELEC certifications (FCC on-going)
- Plug-n-Play Interface for PC applications >
- Available on Android >

11:57 \$	0 = 0	1+*00	
= 1	Measure	:	
: 612.0		i ke 💭	
sa		1	11:59 2 0 1 0 0 3 4 8 30
			E Settings
a			🖗 AutoExposure AutoMance 🛑
			Acquisition time (ms) B4 ms
ia.	1		🛎 Wavelengthiscale 🛛 AutoWanua 🐽
			Lisplayed min
a.			Ulsplayed max 815 nm wavelength
			🚊 Graph color 🔋 BackBainteer 📢
50			Screen background Write/Disck
		-	Ocerfficient D Compare : 98%
0 40	0 450 500 550	600 650	Ö Coefficient Compare: 98%
		4	Calibration
			🕸 Absolute/Relative Otton 🌖
			Devices
			■ ⊛ ∢



Optional modules

SMA-905 OPTICAL FIBER ADAPTOR

The module allows the user to adapt an optical fiber with a standard SMA-905 connector.





LED EXCITATION MODULE

10

The LED module allows the user to add a light source to the IndiGo. This LED module is supplied in standard with 6 UV-A LEDs at 365nm. It can contain up to 2 different light sources that can be fully customised in function of the needs.

This module is very useful for measuring fluorescence spectra in various products such as food products, fluorescent inks or taggants, or various impurities, even at trace level.

LASER MODULE

This module includes a laser excitation source at 532nm (other wavelengths available upon request) and a set of filters to perform laser-induced fluorescence measurements or Raman measurements.

This module is very useful for measuring fluorescence spectra in various products such as food products, or various impurities, even at trace level and for the diamond's identification.





CUVETTE HOLDER MODULE

This module allows the user to measure spectra in liquids thanks to its cuvette holder. This module offers 2 types of lighting: a white LED for absorption and UV- A LEDs for fluorescence.

This module is very useful for chemical analyses, OD measurements...



Specifications

PHYSICAL	
Dimension	76 x 45 x 53 mm
Weight	107g

SPECTROMETER			
Sensor	CMOS Sony IMX334 pixel size: 2µm * 2µm * 1280 lines		
Wavelength Range	380 - 780 nm		
Spectral Resolution	<1.5nm (FWHM)		
Slit (W x H)	25 μm x 3 mm		
Grating	600 Lines/mm, 500 nm Blaze		
Integration Time Range	1ms-24s (multi cycles acquisition available)		
Dynamic Range	20000 :1		
Signal to Noise Ratio	1000 :1		

SYSTEME CONFIGURATIONS

Battery	10h in operation & 24h in standby mode
Data Format	.txt – CVS
Power	5V - 750Ma

ENVIRONMENTAL CONDITIONS

Temperature	0°C - 30°C operation & -10°C - 40°C Stockage
Humidity	0% - 90% noncondensing

INTERFACES

Bluetooth	5.0 Bluetooth Low Energy	
USB	USB-C	
CALIBRATION		
	Made in factory with Hg / Ar low pressure	
Wavelength	lamp	
Intensity	Available in option	



952 952 Ø

LED excitation module


11,7


Cuvette holder module


0


(O)

Core module














Laser module

40 29.2





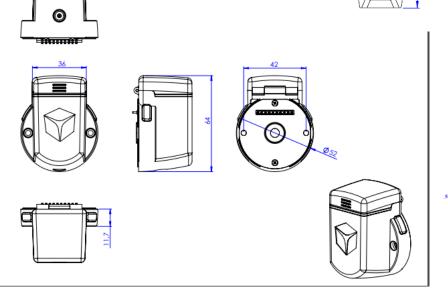

SMA-905 OPTICAL FIBER ADAPTOR

